


Site Plan Notes

- 1 EXISTING SIDEWALK TO REMAIN
- 2 NEW 4" CONCRETE SIDEWALK - REINFORCE. W/ 6X6 - W1.4 X W1.4 W/M. PROVIDE LIGHT BROOM FINISH. CROSS SLOPE MAX 1/2" PER FOOT.
- 3 EXISTING CONCRETE SLAB TO REMAIN, VER. LOCATION
- 4 NOT USED
- 5 NEW SUBSTRATE BELOW
- 6 SITE WORK IN GYM CONTRACT, ADJUST ACCORDING TO TENNIS COURT SITE PLAN.
- 7 NEW CONCRETE FLUME
- 8 PROVIDE MIN OF 1" EXPANSION JOINT BETWEEN NEW AND EXISTING CONSTRUCTION
- 9 NEW 4" CONCRETE SIDEWALK - REINFORCE. W/ 6X6 - W1.4 X W1.4 W/M. PROVIDE LIGHT BROOM FINISH. CROSS SLOPE MAX 1/2" PER FOOT.
- 10 STORM WATER RUN OFF DITCH
- 11 STORM WATER RUN OFF DITCH CENTER LINE
- 12 CONCRETE STEP
- 13 NEW CHAIN LINK FENCE AND GATE, VERIFY LOCATION ON SITE.

Site Plan Legend

- EXISTING CONSTRUCTION
- EXISTING SPOT GRADE
- CONCRETE PAVING / SIDEWALKS
- FENCE
- GYMNASIUM SPOT GRADES
- NEW SPOT GRADES
- SILT FENCE, ADJOIN TO EXISTING SILT FENCE AT GYMNASIUM, SEE DETAIL 09/C1

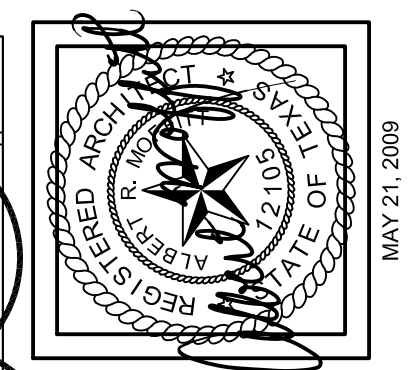


Grimes & Associates
 Architecture - Engineering - Environmental - Construction Management

YEAR 2009 IMPROVEMENTS
CLASSROOM IMPROVEMENTS
 FOR THE
 GRADY INDEPENDENT SCHOOL DISTRICT
 TEXAS
 LENORAH

DATE: 21-May-09
 DRAWN: CWR
 CHECKED: ARM
 REVISION: Δ
 DATE: 25-NOV-09
 JOB # 07031.6

SITE PLAN
 SCALE: 1"=20'-0"

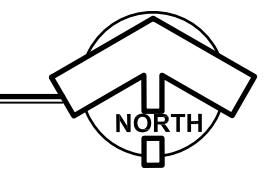

SHEET NO.
C3
 OF 36